

Crescent - Sconce

MAY 2024

INSTALLATION GUIDE



StudioEnti

Crescent - Sconce

MAY 2024

INSTALLATION GUIDE

PLEASE CAREFULLY READ INSTRUCTIONS BEFORE INSTALLATION.

Product	CRESCENT, SCONCE 240V
Product Code	ENTI-CRE-XS/S/M/L
Input Voltage	24V~ DC
Wattage	xs 2.2W/ sml 2.9W/ med 3.6W/ lge 4.4W
Driver	NOT INCLUDED 24V DC LED
Colour Temp	3000K
Lumens	xs 76.5/ sml 115/ med 153/ lge 250
Beam Angle	120 degrees maximum 25°C
Dimming	0-1/10V, DALI, DMX,RF
Wiring	Parallel
Warranty	2 years

DANGER: Lights must be installed by a qualified electrician. Electric shock risk.

- Turn off electrical power before beginning installation and use caution when installing.
- Please do not modify or adjust any fixture in a way that is not clearly stated or intended.
- Always ensure the power is off and the luminaire has cooled down before performing any maintenance to the fitting.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To avoid electric shock, do not touch item if your hands are wet.
- To clean, wipe with a soft damp cloth. Do not soak or immerse the luminaire in water or other liquids.
- Do not use if any breakage or distortion is found on the wiring or socket, or if the products have been wet.
- STUDIO ENTI is not responsible for any damages caused by not following the provided instructions.

This luminaire is intended for mounting to a wall:

- Carefully check luminaire and wiring for damage before use. Do not use the fixture if it is damaged.
- Ensure that local voltage and frequency match the marking.
- For indoor use only.
- Do not disassemble the structure of the fixture.
- Do not leave children alone with the product.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer to avoid hazard.
- Please use reliable suspending and fixing devices to avoid danger.
- Only qualified personnel may install this device. Please observe national installation regulations.

Terminal block shall conform to IEC 60998-2-1 or IEC 60998- 2-02 and must comply with the following specifications:

- With screw or screw-less terminal
- Two terminal poles;
 - Rated voltage: 250V
 - Rated connecting capacity: 10 A; 3 x 0.75-1.5mm²
- During installation, ensure that the basic insulation of the supply lead does not touch the wall cover. Use proper insulation so that the clearance and distance between the live parts and the wall cover is more than 6.5mm between the basic insulation of the supply lead and 3.6mm between the wall cover.
- Keep the terminal block inside the wall cover or fixed to the wall.

StudioEnti

Address	1615 Botany Rd, Botany, NSW
Email	info@studioenti.com.au
Phone	0417 111 688
Web	www.studioenti.com.au

Crescent - Sconce


MAY 2024

INSTALLATION GUIDE - LOW VOLTAGE

PLEASE CAREFULLY READ INSTRUCTIONS BEFORE INSTALLATION.

INSTRUCTIONS

1. Mark up the position of the holes on the wall for either an upward-facing, horizontal, or downward-facing crescent, depending on your final design requirements. Make sure to take note of the keyhole lead-in and the secured location.
2. Use appropriate wall fixings for your substrate/wall - a set of screws is supplied. However, if the provided screws are not suitable for your needs, please source an appropriate option for the substrate.
3. Use wall plugs, and screw the screws in, leaving enough of the length out to accommodate the canopy wall thickness.
NOTE: These handmade pieces vary in wall thickness from piece to piece.
4. Connect electrical cables from the fitting through the wall to the power supply.
5. Install the canopy onto the screws - ensure the screws used have enough torque to hold the piece securely. Tighten screws gently to obtain the best fit.

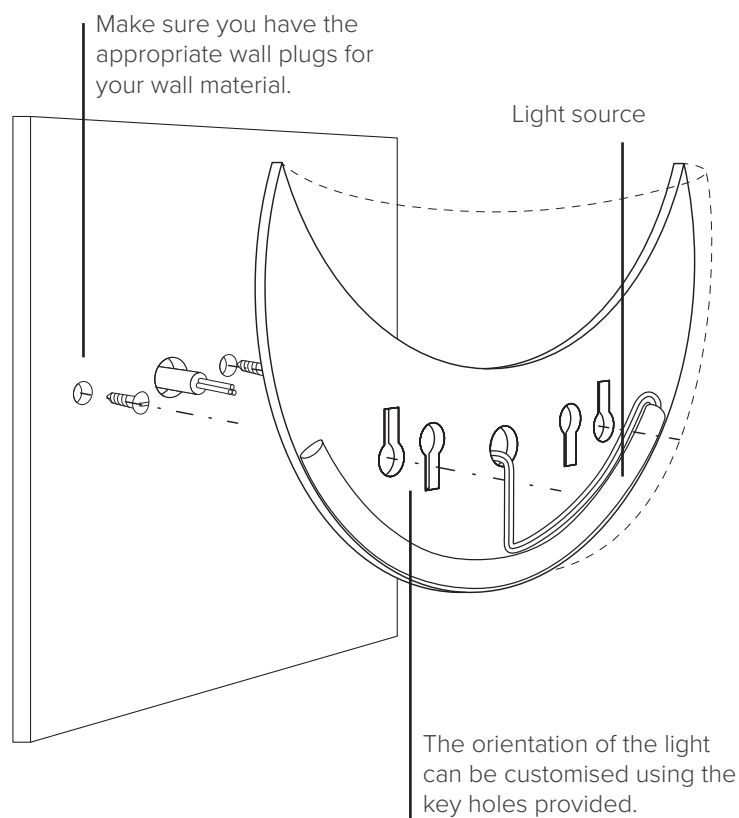

FRAGILE FINISHES

PLEASE WEAR GLOVES
DURING INSTALLATION

StudioEnti

Address	1615 Botany Rd, Botany, NSW
Email	info@studioenti.com.au
Phone	0417 111 688
Web	www.studioenti.com.au