

Pendants

INSTALLATION GUIDE

MAY 2024



Studio Enti

Pendant - Range

INSTALLATION GUIDE

MAY 2024

PLEASE CAREFULLY READ INSTRUCTIONS BEFORE INSTALLATION.

Product	Pendants
Input Voltage	240V
Light fixture	E27/B22/B15 LED only. Globe not included
	For maximum translucency, use higher wattage bulbs for larger pieces. 50W max
Cable	2m Linen 3 core, double insulated
Suspension Cable	L Orb and XL Dawn have a Stainless Steel suspension kit included.
Warranty	2 years

DANGER: Lights must be installed by a qualified electrician. Electric shock risk.

- Turn off electrical power before beginning installation and use caution when installing.
- Please do not modify or adjust any fixture in a way that is not clearly stated or intended.
- Always ensure the power is off and the luminaire has cooled down before performing any maintenance to the fitting.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To avoid electric shock, do not touch item if your hands are wet.
- To clean, wipe with a soft damp cloth. Do not soak or immerse the luminaire in water or other liquids.
- Do not use if any breakage or distortion is found on the wiring or socket, or if the products have been wet.
- STUDIO ENTI is not responsible for any damages caused by not following the provided instructions.

This luminaire is intended for mounting to a ceiling:

- Carefully check luminaire and wiring for damage before use. Do not use the fixture if it is damaged.
- Ensure that local voltage and frequency match the marking.
- For indoor use only.
- Do not disassemble the structure of the fixture.
- Do not leave children alone with the product.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer to avoid hazard.
- Please use reliable suspending and fixing devices to avoid danger.
- Only qualified personnel may install this device. Please observe national installation regulations.

Terminal block shall conform to IEC 60998-2-1 or IEC 60998- 2-02 and must comply with the following specifications:

- With screw or screw-less terminal
- Two terminal poles;
 - Rated voltage: 250V
 - Rated connecting capacity: 10 A; 3 x 0.75-1.5mm²
- During installation, ensure that the basic insulation of the supply lead does not touch the wall cover. Use proper insulation so that the clearance and distance between the live parts and the wall cover is more than 6.5mm between the basic insulation of the supply lead and 3.6mm between the ceiling cover.
- Keep the terminal block inside the ceiling cover or fixed to the ceiling.

StudioEnti

Address	1615 Botany Rd, Botany, NSW
Email	info@studioenti.com.au
Phone	0417 111 688
Web	www.studioenti.com.au

Pendant - Range

INSTALLATION GUIDE

MAY 2024

PLEASE CAREFULLY READ INSTRUCTIONS BEFORE INSTALLATION.

INSTRUCTIONS

1. Drill 35mm hole in Ceiling using holesaw to allow for cable termination. Use Anchors (not provided) to fix the Universal Mounting Bracket to Ceiling.
2. Disassemble the cord grip sub-assembly attached to the Ceiling Rose (take note of the order). Thread the Cord Grip components onto the Linen Cable in this order:
 - A. Cord Grip Shroud
 - B. Cord Grip
 - C. Threaded Washer
3. Thread the Linen Cable through the Ceiling Rose and threaded tube.
4. Adjust the the required height/length of the Cable.

NOTE: If needed efer to the Suspension Kit Instructions below.
5. Tighten the components, ensuring the threaded tube connects to the Cord Grip and threaded washer.
6. Connect electrical leads from the Ceiling to the leads from the Fixture.
7. Attach the Ceiling Rose to the Universal mounting bracket
8. Tighten screws gently to obtain a snug fit.


SUSPENSION KIT INSTRUCTIONS

1. Measure the Suspension Kit cable to be very slightly shorter than the Linen cable so that the suspension cable can take the full weight of the light shade.
2. Thread the Cable through the Ceiling rose, mounted fixture, and tighten.
3. Use the Cable clamp provided to secure the Cable to the Universal Mounting bracket or other appropriate anchor point.



FRAGILE FINISHES

PLEASE WEAR GLOVES
DURING INSTALLATION

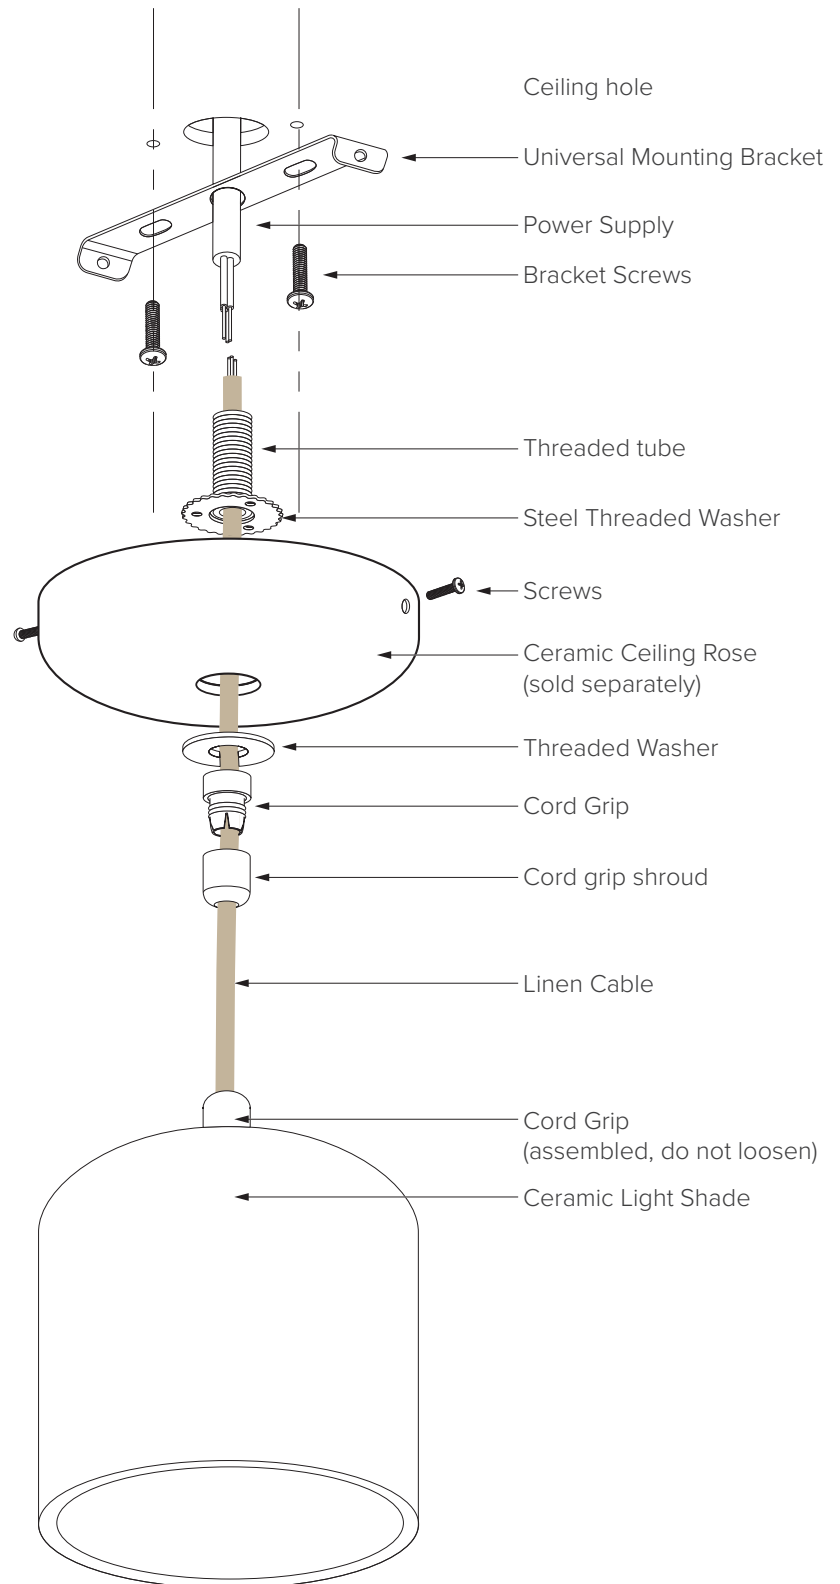

StudioEnti

Address	1615 Botany Rd, Botany, NSW
Email	info@studioenti.com.au
Phone	0417 111 688
Web	www.studioenti.com.au