


Dusked - Eos Wall Light

INSTALLATION GUIDE - 240V

MAY 2024

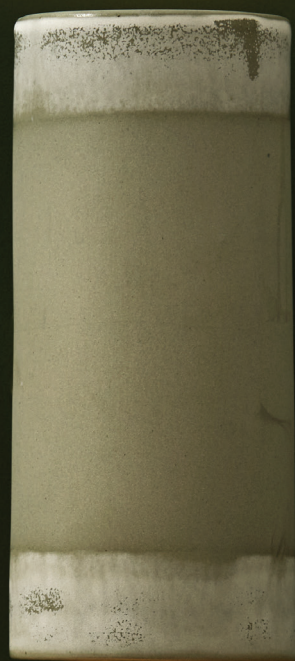

StudioEnti

Dusked - Eos Wall Light

MAY 2024

INSTALLATION GUIDE - 240V

PLEASE CAREFULLY READ INSTRUCTIONS BEFORE INSTALLATION.

Product	EOS, WALL 240V
Product Code	ENTI-EOS-L/M/S/ID
Rated Voltage	220-240 AC
Wattage	Maximum 100W
Frequency	50hz
Fitting	2 LAMPS MAX
Lamp Type	G9 (not included) LED ONLY
Ambient Temp	Maximum 25°C

DANGER: Lights must be installed by a qualified electrician. Electric shock risk.

- Turn off electrical power before beginning installation and use caution when installing.
- Please do not modify or adjust any fixture in a way that is not clearly stated or intended.
- Always ensure the power is off and the luminaire has cooled down before performing any maintenance to the fitting.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To avoid electric shock, do not touch item if your hands are wet.
- To clean, wipe with a soft damp cloth. Do not soak or immerse the luminaire in water or other liquids.
- Do not use if any breakage or distortion is found on the wiring or socket, or if the products have been wet.
- STUDIO ENTI is not responsible for any damages caused by not following the provided instructions.

This luminaire is intended for mounting to a wall:

- Carefully check luminaire and wiring for damage before use. Do not use the fixture if it is damaged.
- Ensure that local voltage and frequency match the marking.
- For indoor use only.
- Do not disassemble the structure of the fixture.
- Do not leave children alone with the product.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer to avoid hazard.
- Please use reliable suspending and fixing devices to avoid danger.
- This is a Class I device and must be connected to a protective grounding.
- Terminal block and connection box is not included.
- Only qualified personnel may install this device. Please observe national installation regulations.

Terminal block shall conform to IEC 60998-2-1 or IEC 60998- 2-02 and must comply with the following specifications:

- With screw or screw-less terminal
- Two terminal poles;
 - Rated voltage: 250V
 - Rated connecting capacity: 10 A; 3 x 0.75-1.5mm²
- During installation, ensure that the basic insulation of the supply lead does not touch the wall cover. Use proper insulation so that the clearance and distance between the live parts and the wall cover is more than 6.5mm between the basic insulation of the supply lead and 3.6mm between the wall cover.
- Keep the terminal block inside the wall cover or fixed to the wall.

FRAGILE FINISHES

PLEASE WEAR GLOVES DURING INSTALLATION



StudioEnti

Address	1615 Botany Rd, Botany, NSW
Email	info@studioenti.com.au
Phone	0417 111 688
Web	www.studioenti.com.au


Dusked - Eos Wall Light

MAY 2024

INSTALLATION GUIDE - 240V

INSTRUCTIONS

1. Drill 35mm hole in Wall (A) using holesaw to allow for cable termination. Use Wall Anchors (not provided) to fix the Universal Mounting Bracket (B) to Wall (A). NOTE: Ensure Universal Mounting Bracket (B) is installed level.
2. Connect electrical leads from the Wall to the leads from the Fixture. Ensure the wires are secure and no bare wires are exposed, using an enclosed junction box.
3. Install the Canopy (C) onto the Wall over the Universal Mounting Bracket (B) and secure in place with screws (D) supplied.
4. Push the G9 Light Globes x2 (E) into the Fixture Sockets (F).
5. Screw the Glass covers (G) x 2 onto the fixture sockets (F). CAUTION: Align threads properly for a smooth rotation before twisting to avoid jamming. Do not overtighten the globe.

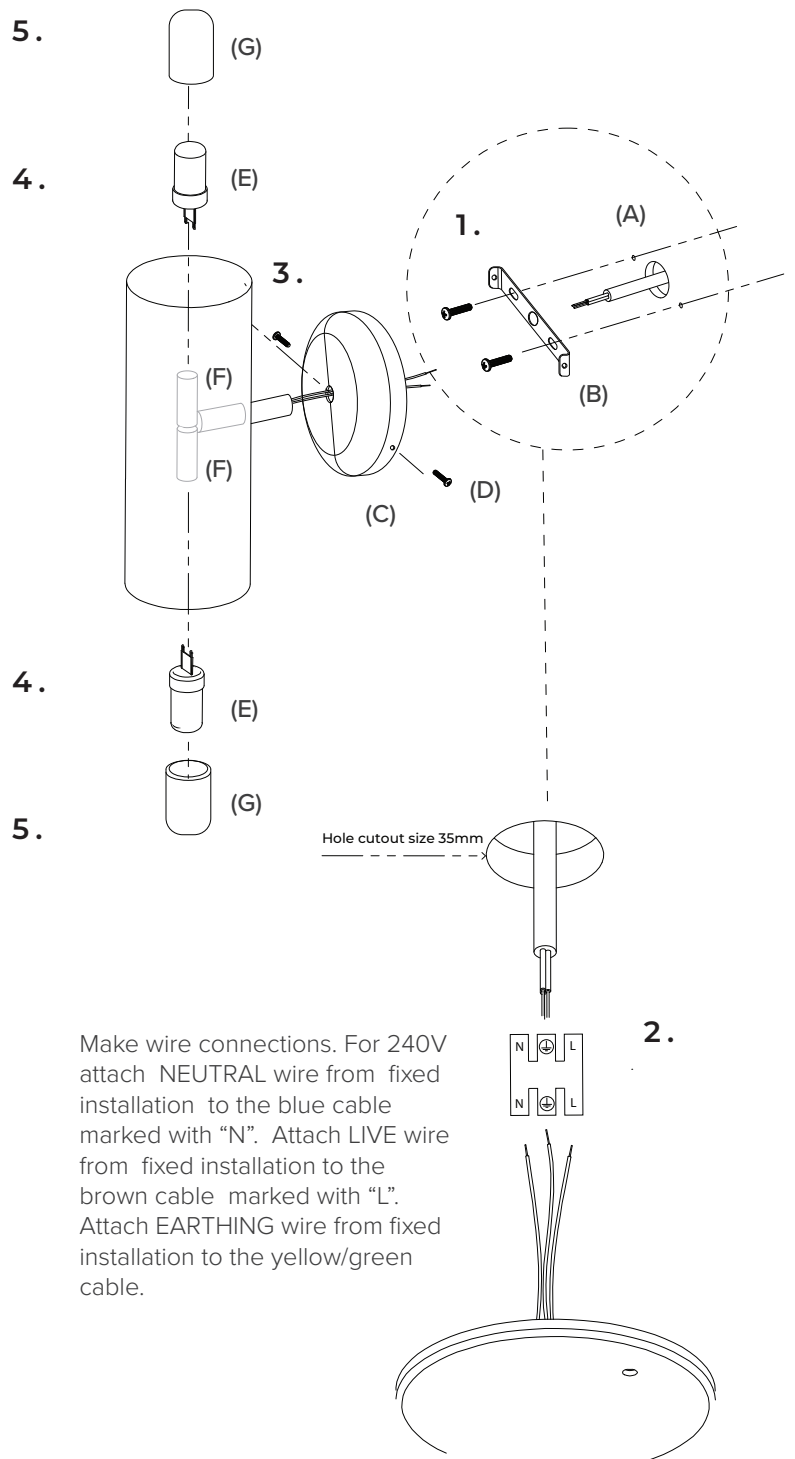

Make wire connections. For 240V attach NEUTRAL wire from fixed installation to the blue cable marked with "N". Attach LIVE wire from fixed installation to the brown cable marked with "L". Attach EARTHING wire from fixed installation to the yellow/green cable.